USB C Multiport Adapter - Portable USB-C Dock with 4K HDMI - 100W PD 3.0 Pass-Through, 1x USB-A, 1x USB-C, GbE - Thunderbolt 3 & USB Type-C Laptop Travel Dock - Mac & Windows

**Product ID:** DKT30CHCPD



Here's an all-in-one USB-C adapter for your MacBook Pro, Dell XPS or other USB-C laptop, with all the ports you need for maximum productivity. The USB-C multiport adapter with HDMI turns your laptop into a portable workstation, adding 4K video, Gigabit Ethernet, and two USB 3.0 ports, plus laptop charging with Power Delivery 3.0.

Use the USB-C adapter as a portable docking station, connecting your laptop to a 4K HDMI monitor (4096 x 2160p) to create a workstation or make presentations. It also connects to an ultrawide monitor.

The USB-C adapter gives you one USB-C port to connect a USB-C device, and one USB-A port to attach a mouse, keyboard or other peripheral. Fast-charge your mobile device using the USB-A port.

With support for 100W Power Delivery 3.0, the USB Type-C multiport adapter provides up to 92W laptop charging, and powers your peripherals when connected to a USB-C power adapter. PD 3.0 features Fast Role Swap to prevent USB data disruption when you unplug to switch power sources (USB-C power adapter to bus power).


The USB Type-C multiport adapter has a built-in wrap-around cable for easy connection and portability.

The Gigabit Ethernet port ensures reliable wired network access.

DKT30CHCPD is backed by a StarTech.com 3-year warranty and free lifetime technical support.

Note: To ensure full adapter functionality, your laptop's USB-C port must support USB Power Delivery and DP Alt Mode.

## Certifications, Reports and Compatibility

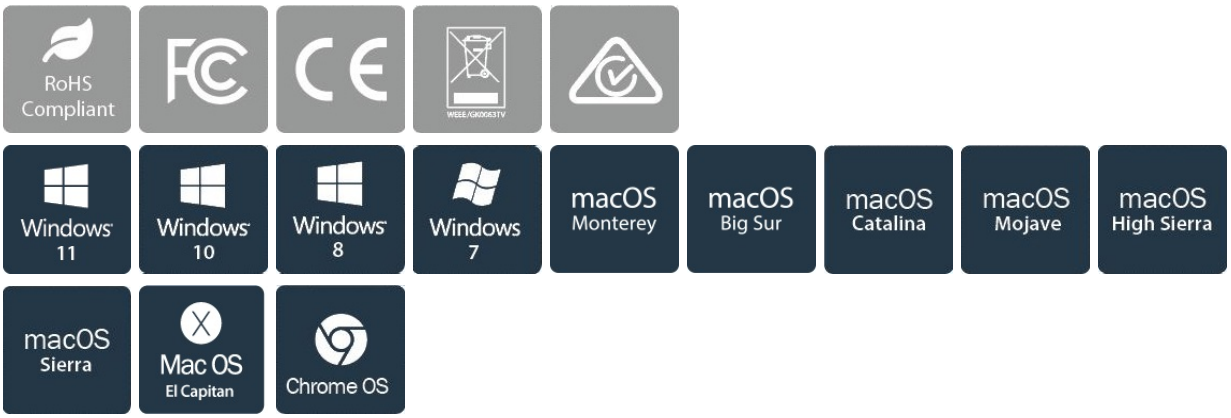


## Applications

• Connect to a 4K HDMI monitor, ideal for meetings and delivering presentations

• Use an HDMI port-equipped television as an external display in a hotel room when traveling

• Power the adapter and your laptop through USB-C, using your laptop's power adapter

• Ideal for small workspaces in offices, home offices as well as office hoteling

## Features

• PORTABLE DOCKING STATION: 4K 30Hz HDMI UHD video (4096x2160p/3840x2160p), Gigabit Ethernet, 1x USB-A (5Gbps, Fast Charging), 1x USB-C (5Gbps) w/ 100W PD 3.0 Passthrough; supports ultrawide monitors

• DESIGNED FOR PORTABILITY: Compact USB-C multiport adapter has a 6" (15cm) wrap around cable to prevent tangling in your bag; for on-the-go users, work from home, office workstations & boardrooms

• WIDE DEVICE COMPATIBILITY: Travel dock for USB-C laptops, ultrabooks, chromebooks, tablets & phones like MacBook Pro/Air, HP EliteBook, Dell XPS/Latitude, Lenovo ThinkPad X1 & Surface Laptop 3/Book 3

• WIDE OS COMPATIBILITY & EASY SETUP: USB Type-C multiport adapter hub w/ automatic driver installation & supports Windows, macOS, Chrome OS, and Android; compatible w/ Thunderbolt 3 (TB3)

• POWER FLEXIBILITY: Mini dock supports laptop USB bus power or up to 100W Power Delivery Passthrough (8W for dock) using your USB-C power adapter to charge laptop & device w/ BC 1.2 (1.5A) USB-A port

**Hardware**

| | |
|---|---|
| Warranty | 3 Years |
| 4K Support | Yes |
| Fast-Charge Port(s) | Yes |
| Displays Supported | 1 |

| | | |
|---|---|---|
| | Bus Type | USB-C |
| | Industry Standards | IEEE 802.3, IEEE 802.3u, IEEE 802.3ab<br>USB 3.0 - Backward compatible with USB 2.0 and 1.1 |
| | Chipset ID | VIA/VLI - VL102<br>VIA/VLI - VL817<br>Parade Technologies - PS176<br>RealTek - RTL8153 |
| **Performance** | | |
| | Maximum Data Transfer Rate | 5 Gbps (USB 3.0) <br / >2 Gbps (Ethernet; Full-Duplex) |
| | Maximum Digital Resolutions | 4096 x 2160p @ 24Hz or 3840 x 2160p (HDMI) @ 30Hz<br / ><br>UltraWide - 3440 x 1440p @ 60 Hz or 2560x1080 at 60Hz<br>Lower resolutions are also supported. For example, if the max is 3840 x 2160p (4K), it also supports 2560 x 1600p and 2560 x 1440p. |
| | Type and Rate | USB 3.0 - 5 Gbit/s |
| | UASP Support | Yes |
| | Auto MDIX | Yes |
| | Full Duplex Support | Yes |
| **Connector(s)** | | |
| | Connector Type(s) | 1 - USB 3.2 Type-C (24 pin, Gen 1, 5Gbps)<br>1 - HDMI (19 pin)<br>1 - RJ-45<br>1 - USB 3.2 Type-A (9 pin, Fast-Charge)<br>1 - USB 3.2 Type-C (24 pin, Gen 1, 5Gbps) |
| **Software** | | |
| | OS Compatibility | Windows 7, 8, 8.1, 10, 11<br / >macOS 10.9 to 10.15, 11.0, 12.0, 13.0, 14.0<br / >Chrome OS |

| | | |
|---|---|---|
| **Special Notes / Requirements** | | |
| | System and Cable Requirements | A host laptop with an available USB-C port (to ensure full adapter functionality, the host USB-C port must support USB Power Delivery 2.0 or PD 3.0 and DP alt mode)<br><br>Optional: USB-C power adapter (for example, your laptop's USB-C based power adapter) |
| | Note | Not all USB-C ports support the full functionality of the USB Type-C standard. Ensure that your host USB-C port supports USB Power Delivery 2.0 or 3.0 and DP alt mode.<br><br>The adapter can connect to a host laptop's USB-C port that doesn't support USB Power Delivery 2.0 or 3.0. However, in this configuration if a power adapter is connected to the multifunction adapter, it will not pass power through to your host laptop.<br><br>A 4K-capable display is required to achieve 3840 x 2160p resolution (4K is also known as 4K x 2K)<br><br>USB 3.0 is also known as USB 3.1 Gen 1; this connectivity standard offers speeds up to 5Gbps.<br><br>Your laptop may have specific requirements for charging. This USB-C multiport adapter supports USB Power Delivery 3.0, up to 100W. When using your laptop's USB-C power adapter, the multiport adapter powers both the adapter (with attached peripherals) and your laptop - with up to 92W charging available for laptop charging. For more information on your laptop's charging requirements, refer to the manufacturer of your laptop.<br><br>Through support of USB Power Delivery 3.0, the multiport adapter supports Fast Role Swap which prevents USB data disruption when you unplug to switch power sources (USB-C power adapter to bus power). |
| **Power** | | |
| | Power Source | USB-Powered |
| | Power Delivery | 100W |
| **Environmental** | | |
| | Operating Temperature | 0C to 45C (32F to 113F) |
| | Storage Temperature | -10C to 70C (14F to 158F) |
| | Humidity | 10%-85%RH |
| **Physical Characteristics** | | |
| | Color | Black |

| | | |
|---|---|---|
| | Material | Plastic |
| | Product Length | 6.6 in [16.7 cm] |
| | Product Width | 1.5 in [3.8 cm] |
| | Product Height | 0.3 in [0.8 cm] |
| | Weight of Product | 4.5 oz [127.0 g] |
| **Packaging Information** | | |
| | Package Quantity | 1 |
| | Package Length | 6.7 in [17.0 cm] |
| | Package Width | 5.6 in [14.2 cm] |
| | Package Height | 1.2 in [3.0 cm] |
| | Shipping (Package) Weight | 4.8 oz [135.0 g] |
| **What's in the Box** | | |
| | Included in Package | 1 - multiport adapter |
| | | 1 - instruction manual |

***Product appearance and specifications are subject to change without notice.***